

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2004 年 4 月 22 日 (22.04.2004)

PCT


(10) 国際公開番号
WO 2004/033144 A1

- (51) 国際特許分類: B23K 31/00, 9/02, 9/235 (72) 発明者; および
(21) 国際出願番号: PCT/JP2003/012916 (75) 発明者/出願人 (米国についてのみ): 中島 清孝
(22) 国際出願日: 2003 年 10 月 8 日 (08.10.2003) (NAKASHIMA, Kiyotaka) [JP/JP]; 〒293-8511 千葉県
(25) 国際出願の言語: 日本語 宮津市 新富 2 0-1 新日本製鐵株式会社 技術開発本
(26) 国際公開の言語: 日本語 部内 Chiba (JP). 石川 忠 (ISHIKAWA, Tadashi) [JP/JP];
(30) 優先権データ: 〒293-8511 千葉県 宮津市 新富 2 0-1 新日本製鐵
特願2002-294397 2002 年 10 月 8 日 (08.10.2002) JP 株式会社 技術開発本部内 Chiba (JP).
(71) 出願人 (米国を除く全ての指定国について): 新日 (74) 代理人: 青木 篤, 外 (AOKI, Atsushi et al.); 〒105-8423
本製鐵株式会社 (NIPPON STEEL CORPORATION) 東京都 港区 虎ノ門 三丁目 5 番 1 号 虎ノ門 3 7 森ビ
[JP/JP]; 〒100-8071 東京都 千代田区 大手町 二丁目 6 番 3 号 Tokyo (JP). ル 青和特許法律事務所 Tokyo (JP).
(51) 指定国 (国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KR, KZ, LC, LK, LR, LS, LT,

/続葉有/

(54) Title: BOXING JOINT WITH EXCELLENT FATIGUE STRENGTH, METHOD OF MANUFACTURING THE BOXING JOINT, AND WELDED STRUCTURE

(54) 発明の名称: 疲労強度に優れた回し溶接継手、回し溶接継手の製造方法、および、溶接構造物

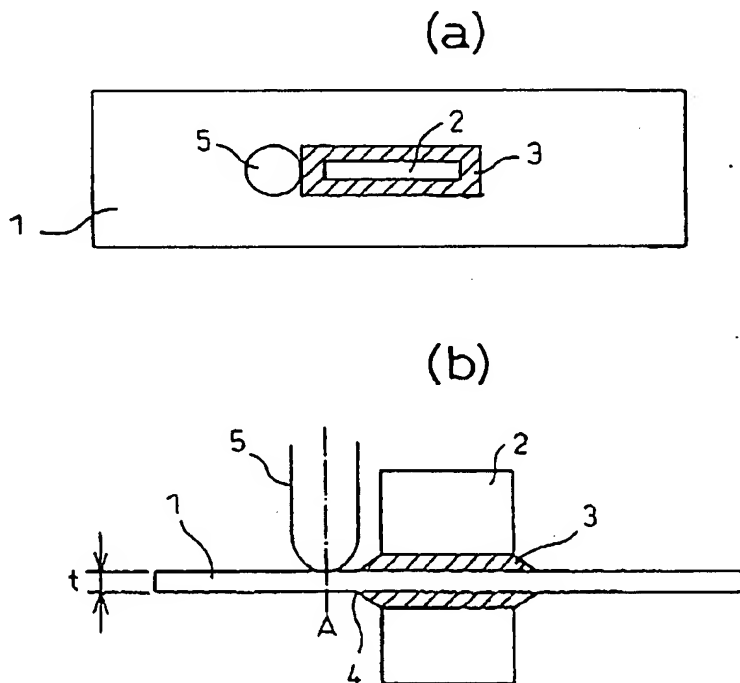

(57) Abstract: A boxing joint with an excellent fatigue strength used for welded structures such as buildings, ships, bridges, construction machinery, and marine structures to weld the end parts of two steel plates vertically combined with each other, a method of manufacturing the boxing joint, and welded structures using the boxing joint, the boxing joint wherein at least the steel plate of the two steel plates to which a main stress is applied is formed to suppress the propagation of fatigue cracking and, desirably, to have a compressive residual stress on the front surface layer of the steel plate, and where the plate thickness of the steel plate is t , a residual stress in a main stress direction in an area of $t/10$ or more or 3 mm or more from the boxing welding face of the steel plate in a plate thickness direction is the compressive residual stress.

/続葉有/

WO 2004/033144 A1



LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

OAPI 特許 (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

添付公開書類:

— 国際調査報告書

(84) 指定国 (広域): ARIPO 特許 (GH, GM, KE, LS, MW, MZ,
SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア特許 (AM,
AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ特許
(AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,
GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR),

2 文字コード及び他の略語については、定期発行される
各 PCT ガゼットの巻頭に掲載されている「コードと略語
のガイダンスノート」を参照。

(57) 要約: 建築、造船、橋梁、建設機械、海洋構造物などの溶接構造物に用いられる、2 枚の鋼板を垂直に組み合わせた端部を溶接する疲労強度に優れた回し溶接継手、回し溶接継手の製造方法、および、回し溶接継手を用いた溶接構造物を提供するものであり、2 枚の鋼板を垂直に組み合わせた端部を溶接する回し溶接継手において、前記 2 枚の鋼板のうち少なくとも主応力がかかる側の鋼板が疲労き裂の伝播を抑制する鋼板、好ましくは、鋼板の表層に圧縮残留応力を有する鋼板、であって、該鋼板の板厚を t とするとき、該鋼板の回し溶接面から板厚方向に $t/10$ 以上、または 3 mm 以上の範囲までの主応力方向の残留応力が、圧縮残留応力である。

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/12916

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl.⁷ B23K31/00, B23K9/02, B23K9/235

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ B23K31/00, B23K9/02, B23K9/235

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1926-1996	Toroku Jitsuyo Shinan Koho	1994-2004
Kokai Jitsuyo Shinan Koho	1971-2004	Jitsuyo Shinan Toroku Koho	1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2003-1476 A (Nippon Steel Corp.), 08 January, 2003 (08.01.03), Full text (Family: none)	1-4
A	JP 2003-1477 A (Nippon Steel Corp.), 08 January, 2003 (08.01.03), Full text (Family: none)	1-4
A	JP 8-333632 A (Ishikawajima-Harima Heavy Industries Co., Ltd.), 17 December, 1996 (17.12.96), Full text (Family: none)	1-4

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

"A" Special categories of cited documents:
document defining the general state of the art which is not
considered to be of particular relevance

"E" earlier document but published on or after the international filing
date

"L" document which may throw doubts on priority claim(s) or which is
cited to establish the publication date of another citation or other
special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other
means

"P" document published prior to the international filing date but later
than the priority date claimed

"T" later document published after the international filing date or
priority date and not in conflict with the application but cited to
understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be
considered novel or cannot be considered to involve an inventive
step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be
considered to involve an inventive step when the document is
combined with one or more other such documents, such
combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
13 January, 2004 (13.01.04)Date of mailing of the international search report
03 February, 2004 (03.02.04)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1998)

EV 321841565 US